


# DS-D2046NH-C LCD Display Unit

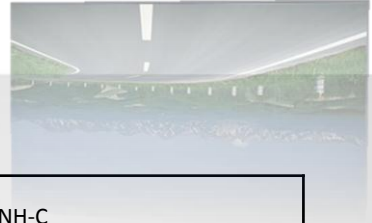

<b>Model</b>	LCD Display Unit	DS-D2046NH-C
<b>Display</b>	Diagonal Size (inch)	46"
	Backlight	LED Backlight (Direct type)
	Panel	S-PVA
	Resolution	1920*1080
	Color	16.7M
	Visual Angle	Horizontal: 178°, Vertical: 178°
	Response Time	8ms (G to G)
	Contrast	4500:1
	Brightness	800cd/m <sup>2</sup>
	Dot Pitch (H×V)	0.53025mm×0.53025mm (0.021"×0.021")
	Color Saturation	92%
	Screen Moving Area (H×V)	1018.08mm×572.67mm (40.08"×22.55")
<b>Side Frame Size</b>	Physical Seam	3.5 mm (0.14")
<b>Interface</b>	Input Interface	VGA×1, DVI×1, BNC×1, YPbPr×1, HDMI×1
	Output Interface	VGA×1, DVI×1, BNC×2
	Control Interface	In:RS-232,Out:RS-232×2(Loop)
<b>Power</b>	Power Consumption	139W
	Power Requirement	90~264VAC, 50/60Hz
<b>Working Environment</b>	Operating Temperature	0 °C ~ 40 °C (32 °F ~ 104 °F)
	Operating Humidity	10%~85% (No Condensation)
	Working Life	≥60,000 Hours
<b>Physical Features</b>	Dimension (W×H×D)	1022.08mm×576.67mm×120.3mm (40.24"×22.70"×4.74")
	Frame Width	0.09" (Left/Upper), 0.047" (Right/Lower)