


## DS-D2055NL-E/G LCD Display Unit

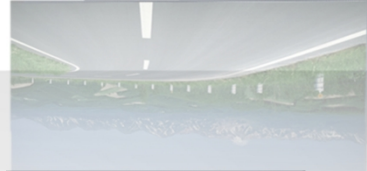

Model	LCD Display Unit	DS-D2055NL-E/G
Display	Diagonal Size (inch)	55"
	Backlight	LED Backlight (Direct type)
	Panel	S-PVA
	Resolution	1920×1080
	Color	10Bit (D), 1.06 Billion Colors
	Visual Angle	Horizontal: 178°, Vertical: 178°
	Response Time	8ms (G to G)
	Contrast	4000:1
	Brightness	500cd/m <sup>2</sup>
	Dot Pitch (H×V)	0.63mm×0.63mm (0.025"×0.025")
	Color Saturation	92%
	Screen Moving Area (H×V)	1209.6mm×680.4mm (47.62"×26.79")
Side Frame Size	Physical Seam	1.8 mm (0.072")
Interface	Input Interface	VGA×1, DVI×1, BNC×1, YPbPr×1, HDMI×1, USB×1
	Output Interface	VGA×1, DVI×1, BNC×2
	Control Interface	RJ45 for RS-232(IN×1,OUT×2)
Power	Power Consumption	192W
	Power Requirement	100~240VAC, 50/60Hz
Working Environment	Operating Temperature	0 °C ~ 50 °C (32 °F ~ 122 °F)
	Operating Humidity	10%~90% (No Condensation)
	Working Life	≥60,000 Hours
Physical Features	Dimension (W×H×D)	1211.54mm×682.34mm×112.4mm (47.78"×26.94"×4.38")
	Frame Width	0.035" (Left/Upper), 0.035" (Right/Lower)