

DS-2CE55F4P-IRP


1.3MP Sensor Indoor IR Dome Camera



Key features

- 1.3MP Sensor: 1305 (H) x 1049(V) Effective Pixels
- 1.3MP Horizontal Resolution • True Day/Night • 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance • Smart IR, high dynamic range
- Superior video image output and ultra low light illumination
- Wide operating temperature range

Dimensions

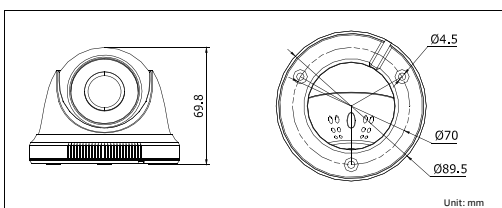

DS-2CE55F4P(N)-IRP	
Camera	
Image Sensor	1.3 MP Sensor
Signal System	PAL/NTSC
Effective Pixels	1305 (H) × 1049 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/25,000 s NTSC: 1/30 s to 1/30,000 s
Lens	3.6mm (2.8mm, 6mm optional)
	Angle of view: 71.4° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°;Tilt: 0 - 75°; Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	1.3MP Sensor
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 1.5 W (Max. 4.5 W with IR cut filter on)
IR Range	20 meters
Dimensions	Φ89.5 × 69.8 mm(Φ3.52"×2.75")
Weight	200 g (0.44 lbs)

Accessories



DS-1229ZJ-1
(Wall Mount)



DS-1239ZJ-1
(Wall Mount)

Available models

PAL: DS-2CE55C2P-IRP
NTSC : DS-2CE55C2N-IRP