


Specifications

DS-D5022FC	
Display Type	LED Backlit TFT LCD
Screen Size	21.5"
Pixel Pitch (H x V)	0.248 mm x 0.248 mm
Maximum Resolution	1920 x 1080
Brightness	250 cd/m ² (typical)
Contrast	1000:1
Response Time	5 ms
Color	16.7 M
Viewing Angle	Horizontal 170°, vertical 160°
Input	
VGA	1
HDMI	1
Audio (L/R)	In x 1; out x 1
BNC (In/Out)	In x 1; out x 1
PC Audio In	1
Headphone Out	1
USB	1
Audio	
Audio Input	1, 3.5 mm mini-jack
Audio Output	1, 3.5 mm mini-jack
Speaker	2 W x 2
Mounting	
VESA	100 mm x 100 mm
General	
Power Supply	100 to 240 VAC, 50/60 Hz
Consumption	< 30 W (on), < 0.5 W (standby)
Operating Temperature	32° F to 104° F (0° C to 40° C)
Operating Humidity	10% to 85% (no condensation)
Storage Temperature	-4° F to 131° F (-20° C to 55° C)
Storage Humidity	5% to 95% (no condensation)
Dimensions (W x H x D)	20.13" x 12.32" x 1.79" (511.40 mm x 313.00 mm x 45.4 mm)
Weight	Gross weight: 10.13 lbs (4.6 kg), net weight: 7.05 lbs (3.2 kg)
Included Accessories	Power cord x 1, VGA cord x 1, user manual x 1, warranty card x 1, adapter x 1, base bracket x 1

Interface

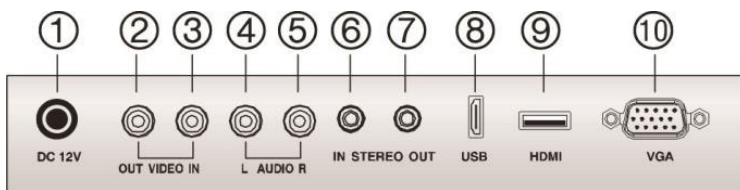

Number	Description
1	12 VDC Input
2	Video Out: BNC Output
3	Video In: BNC Input
4	Audio L: Audio Signal Input Left
5	Audio R: Audio Signal Out Right
6	Stereo In: Audio Signal Input
7	Stereo Out: Audio Signal Output
8	USB
9	HDMI: HDMI Signal Input
10	VGA: VGA Analog Signal Input

Accessories

