

Specifications

| Model | | DS-D5A75RB/A | |
|-----------|---|--|----------------------------|
| Screen | Diagonal Screen Size | 75" | |
| | Backlight | LED Backlight | |
| | Resolution | 3840 × 2160 @60 Hz | |
| | Display Scale | 16:9 | |
| | Pixel Pitch | 0.429(H) × 0.429(V) mm | |
| | Color | 10 bit | |
| | Brightness | 350 cd/m ² | |
| | Contrast | 1200: 1 | |
| | Response Time | 8 ms | |
| | Viewing Angle | Horizontal 178°, vertical 178° | |
| Interface | HDMI In | 2, Max. 4K@30Hz | |
| | HDMI Out | 1, Max. 4K@60Hz | |
| | VGA In | 1, Max. 1080P@60Hz | |
| | Audio In | 2 | |
| | Audio Out | 2 | |
| | USB Interface | 2 USB on front panel , 2 USB on side panel | |
| | RJ45 (100Mbps ports) | 2 | |
| General | Power Supply | 100 V to 240 VAC, 50/60 Hz | |
| | Power Consumption | < 500 W | |
| | Net Weight | 57.620 kg | |
| | Gross Weight (with package) | 74.620 kg | |
| | Product Dimensions (Width × Height × Thickness) | 1737 × 1041 × 104 mm | |
| | Package Dimensions (Width × Height × Thickness) | 1950 × 1225 × 293 mm | |
| | Working Temperature | 0°C to 40°C | |
| | Working Humidity | 10% to 90% | |
| | Built-in System | CPU | 4-core Cortex-A53, 1.5 GHz |
| | | Memory | 2 GB |


| | | |
|--|-------------------------|--|
| | Storage | 32 GB |
| | NIC | Built-in 100Mbps NIC, supporting routing |
| | Speaker | Built-in 16 W speaker × 2 |
| | Decoding | H.265/H.264, 4K@60 × 1 |
| | Operation System | Android 5.0 |

Available Models

DS-D5A75RB/A

Physical Interface

Bottom interfaces of the rear panel:

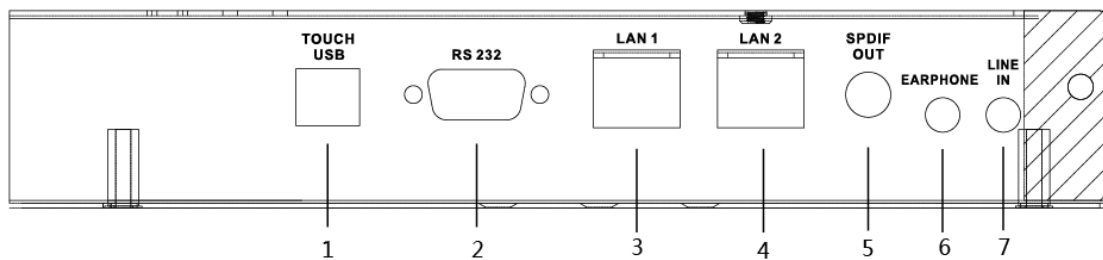

| Interface | Description | Interface | Description |
|-------------|---------------------------------------|------------|----------------------|
| 1.TOUCH-USB | Peripheral Touch Interface | 2.RS-232 | RS-232 Serial Port |
| 3.LAN 1 | Ethernet Interface 1 | 4. LAN 2 | Ethernet Interface 2 |
| 5.SPDIF OUT | Digital Multi-media Speaker Interface | 6.EARPHONE | Earphone Interface |
| 7.LINE IN | Audio Input Interface | --- | --- |

Left interfaces of the rear panel:

