

Specifications

Model		DS-D5A65RB/A
Screen	Diagonal Screen Size	65"
	Backlight	LED Backlight
	Resolution	3840 × 2160 @60 Hz
	Display Scale	16:9
	Pixel Pitch	0.496(H) × 0.372(V) mm
	Color	10 bit
	Brightness	400 cd/m ²
	Contrast	1200: 1
	Response Time	6 ms
	Viewing Angle	Horizontal 178°, vertical 178°
Interface	HDMI In	2, Max. 4K@30Hz
	HDMI Out	1, Max. 4K@60Hz
	VGA In	1, Max. 1080P@60Hz
	Audio In	2
	Audio Out	2
	USB Interface	2 USB on front panel , 2 USB on side panel
	RJ45 (100Mbps ports)	2
General	Power Supply	100 to 240 VAC, 50/60 Hz
	Power Consumption	< 300 W
	Net Weight	50.500 kg
	Gross Weight (with package)	62.500 kg
	Product Dimensions (Width × Height × Thickness)	1505 × 907 × 114 mm
	Package Dimensions (Width × Height × Thickness)	1735 × 1105 × 290 mm
	Working Temperature	0°C to 40°C
	Working Humidity	10% to 90%
	Built-in System	CPU
Memory		2 GB


	Storage	32 GB
	NIC	Built-in 100Mbps NIC, supporting routing
	Speaker	Built-in 16 W speaker × 2
	Decoding	H.265/H.264, 4K@60 × 1
	Operation System	Android 5.0

Available Models

DS-D5A65RB/A

Physical Interface

Bottom interfaces of the rear panel:

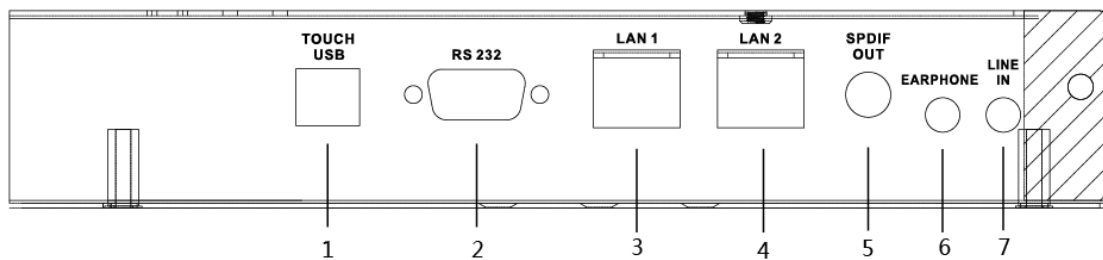

Interface	Description	Interface	Description
1.TOUCH-USB	Peripheral Touch Interface	2.RS-232	Serial Port
3.LAN 1	Ethernet Interface 1	4. LAN 2	Ethernet Interface 2
5.SPDIF OUT	Digital Multi-media Speaker Interface	6.EARPHONE	Earphone Interface
7.LINE IN	Audio Input Interface	---	---

Left interfaces of the rear panel:

